


ONKYO® SERVICE MANUAL

Compact Disc Player MODEL C-701A

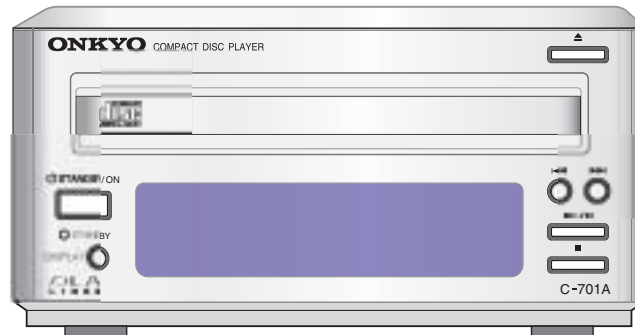

Silver model

SMPP, SMGT	230-240V AC, 50Hz
SMDT	120V AC, 60Hz
SMGR	220-230V AC, 50/60Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

SERVICE PROCEDURES 1

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs a laser. Therefore, be sure to follow carefully the instructions below when servicing.

WARNING!!

SERVICE WARNING : DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICKUP BLOCK.

LASER WARNING LABEL

The labels shown below are affixed.

1. Warning label



DANGER:

INVISIBLE LASER RADIATION WHEN OPEN AND INTERLOCK FAILED OR DEFEATED. AVOID DIRECT EXPOSURE TO BEAM.

CAUTION:

HAZARDOUS LASER AND ELECTROMAGNETIC RADIATION WHEN OPEN AND INTERLOCK DEFEATED.

ATTENTION:

RAYONNEMENT LASER ET ELECTROMAGNETIQUE DANGEREUX SI OUVERT AVEC L'ECLANCHEMENT DE SECURITE ANNULE.

2. Class 1 label



MPP/MGT



MDT



MGR

1. Replacing the fuse

 THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD. REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL

 CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST LENT. POUR UNE PROTECTION PERMANENTE, N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DERNIER EST INDIQUE LA QU LE PRESENT SYMBOLE EST APPOSE.

REF. NO.	PART NO.	DESCRIPTION
F901	252074	2A-SE-EAK <MPP,MGR,MGT>

2. Safety check out (Only U.S.A. model)

After correcting the original service problem perform the following safety check before releasing the set to the customer.


Connect the insulating-resistance tester between the plug of power supply cord and terminal GND on the back panel.

Specifications: More than 10 M ohm at 500V.


SERVICE PROCEDURES 2

1. Removement of tray


1. Remove the top cover
2. Turn the locked screw to the clockwise to release the lock of gear. (Refer to fig-1)



3. Pull out the tray.
4. Remove the stopper. (Refer to fig-2)

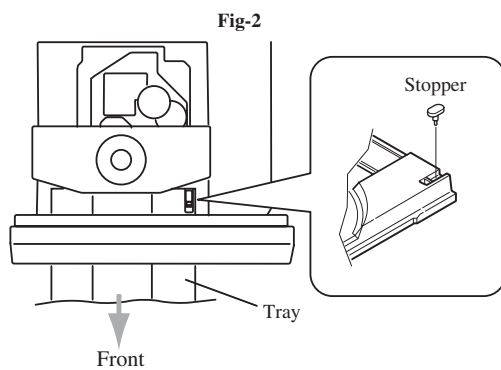


5. Press the tray stopper to the arrow mark direction and remove the tray ass'y. (Refer to fig-3)

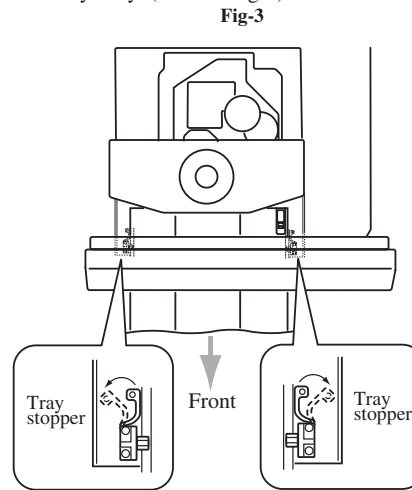

2. Replacement of optical pick-up

The laser diode in the optical pickup block is so sensitive to static electricity, surge current and etc. that the components are liable to be broken down or its reliability remarkably deteriorated. During repair, carefully take the following precautions.

1. Solder the LD short terminal on mechanism.
2. Disconnect the flexible flat cable P101.
3. Replace the optical pickup.
4. Connect the flexible flat cable P101.
5. Unsolder the LD short terminal on mechanism.

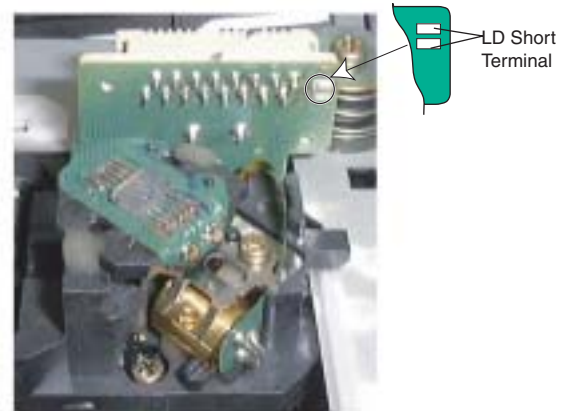

Pick up short land

NOTE

1. Ground for the work-desk.
Place a conductive sheet such as a sheet of copper (with impedance lower than 10Mohm) on the work-desk and place the set on the conductive sheet so that the chassis can be grounded.
2. Grounding for the test equipments and tools.
Test equipments and toolings should be grounded in order that their ground level is the same the ground of the power source.
3. Grounding for the human body.
Be sure to put on a wrist-strap for grounding whose other end is grounded.
Be particularly careful when the workers wear synthetic fiber clothes, or air is dry.
4. Select a soldering iron that permits no leakage and have the tip of the iron well-grounded.
5. Do not check the laser diode terminals with the probe of a circuit tester or oscilloscope.

SPECIFICATIONS

Signal readout system : Optical non-contact
 Reading rotation : About 500 - 200 r.p.m.
 (constant linear velocity)
 Linear velocity : 1.2 - 1.4 m/s
 Error correction system :
 Cross Interleave Reed Solomon code
 D/A converter : 1 bit D/A converter
 Sampling frequency : 352.8 kHz
 (Eight-times oversampling)
 Number of channels : 2 (stereo)
 Frequency response : 5 Hz - 20 kHz
 Total harmonic distortion : 0.009% (at 1 kHz)
 Dynamic range : 92 dB
 Signal to noise ratio : 80 dB
 Channel separation : 80 dB (at 1 kHz)

Wow and Flutter :
 Below threshold of measurability
 Output level : 2 volts r.m.s.
 Power consumption :
 AC 230-240 V, 50 Hz model : 8 watts
 AC 220-230V, 50Hz/60Hz : 8 watts
 AC 120 V, 60 Hz model : 9 watts
 Power supply rating :
 AC 230-240 V, 50 Hz
 AC 220-230V, 50Hz/60Hz
 AC 120 V, 60 Hz
 Dimensions (W x H x D) :
 155 x 76 x 283.5 mm <MGR> model
 6-1/8" x 3" x 11-3/16"
 155 x 76 x 281.5 mm <MPP/MGT> model
 6-1/8" x 3" x 11-1/16"
 155 x 76 x 277.5 mm <MDT> model

Weight : 2.0 kg, 4.4 lbs.


Specifications and external appearance are subject to change without notice because of product improvements.

<MPP>: European model only
 <MDT>: Taiwanese model only
 <MGT>: Asian model only
 <MGR>: Chinese model only

CONFIRM THE FL DISPLAY

- 1) Press the STANDBY key ON.
- 2) Press and hold down the STOP ■ button, then press the UP ► button.
 After " 010702A" (Microprocessor version) is displayed. All the segments of FL tube light up after 1 seconds.
- 3) Press the STOP key . ("NO KEY" is displayed)
- 4) Confirm the each key.
- 5) Press the STANDBY key to release the test mode.

EXPLODED VIEW

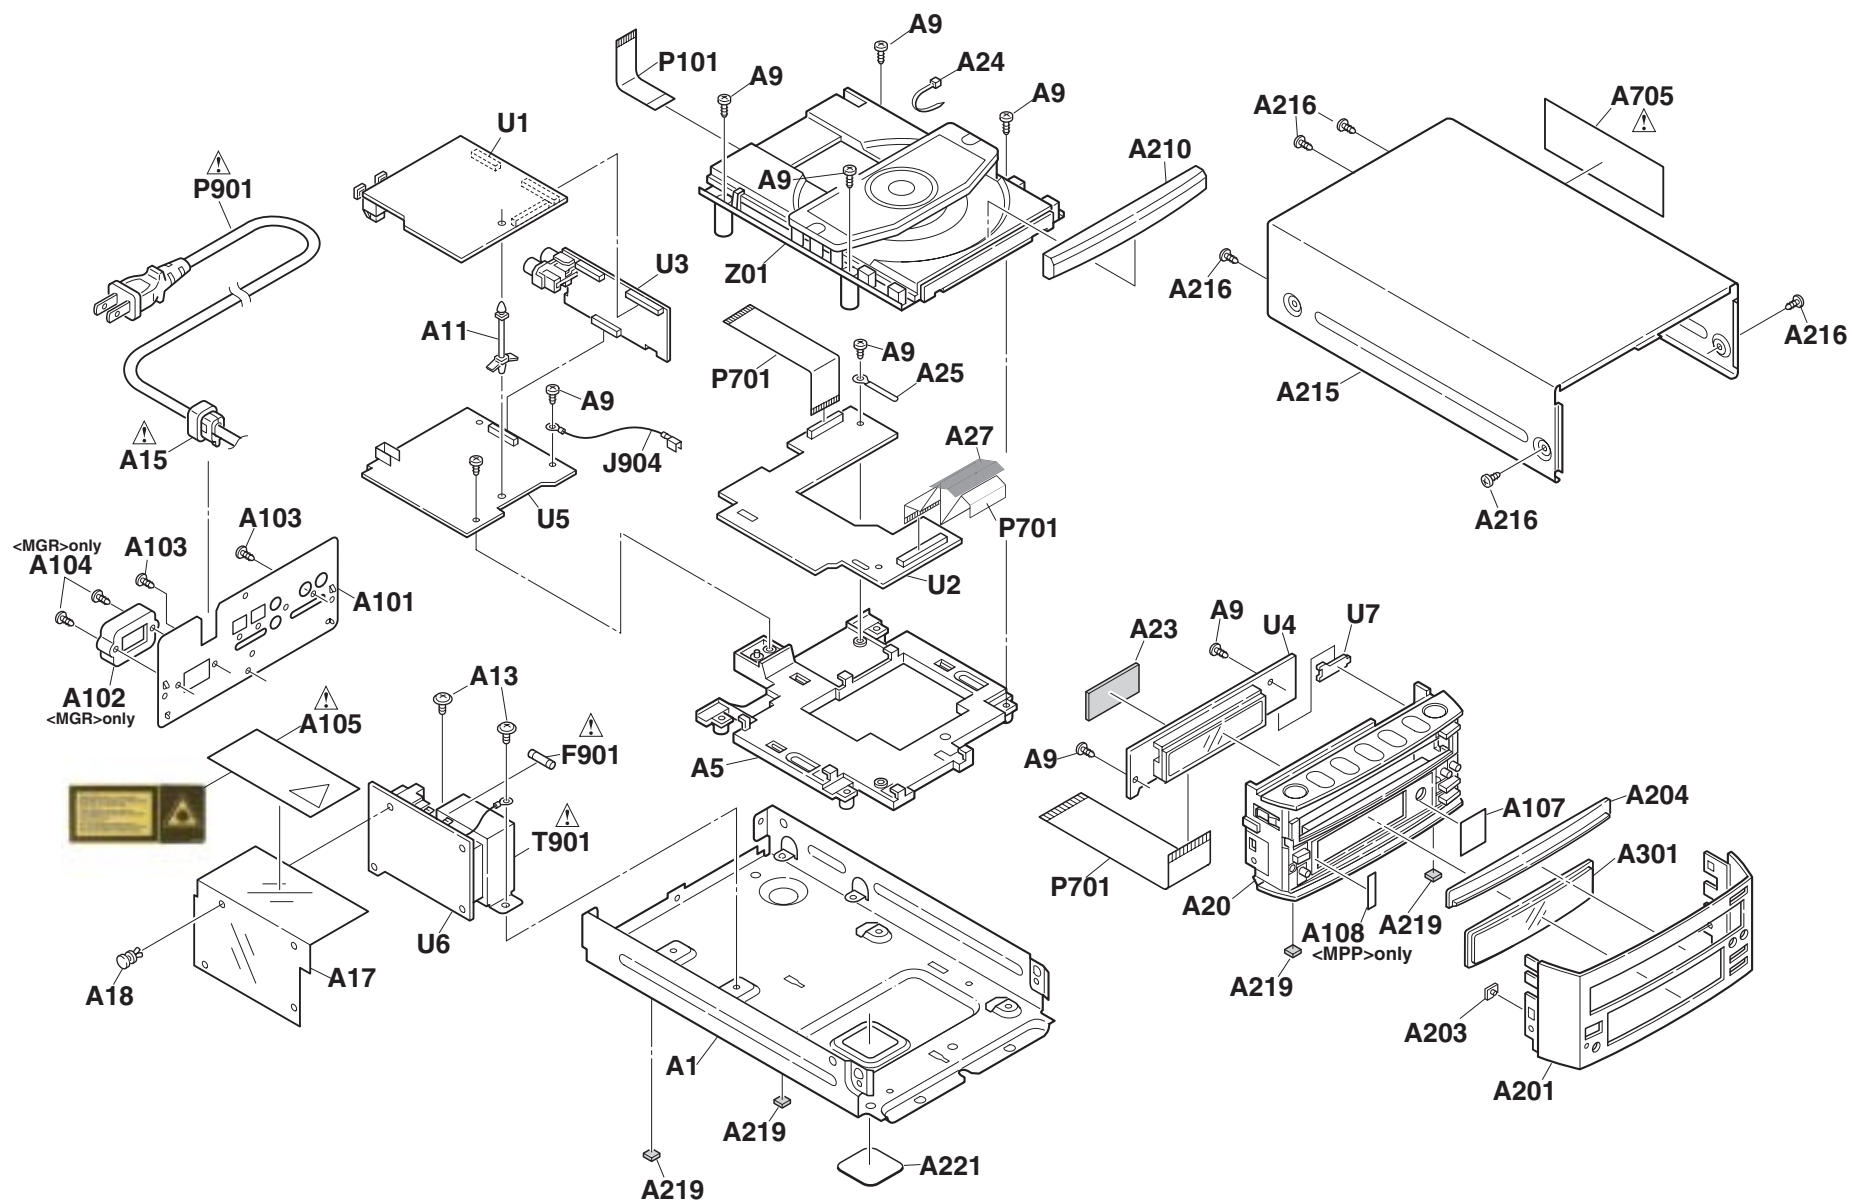

EXPLODED VIEW PARTS LIST-1

REF. NO.	PART NO.	DESCRIPTION
A1	27100409	Chassis
A5	27191158A	Holder, PCB
A9	838130088	Self tapping screw, 3TTB+8B
A11	27190369	Holder, PCB
A13	830440069	Self tapping screw, 4TTC+6C(BC)
A15	⚠ 27300750	Bushing, S-RELIEF #2271
A17	27150476	Shield plate (PT)
A18	880048	Plastic rivet, P-3055B-8L
A20	27111246	Front bracket
A23	28141478	Cushion
A24	260208	Wire tie
A25	27255004	Clip, CS-1U
A27	29110083	Tape CROSS-16U 16 x 35mm
A101	27122925	Rear panel <MPP>
	27122926	Rear panel <MDT>
	27122927	Rear panel <MGR>
	27122932	Rear panel <MGT>
A102	27191143	Holder Outlet <MGR>
A103	838430088	Self tapping screw, 3TTB+8B(BC) <MPP,MDT,MGT>
A104	838430088	Self tapping screw, 3TTB+8B(BC) <MGR>
A105	⚠ 29362285	Label
A107	27262674	Plate, WIN1
A108	27262675	Plate, WIN1<MPP>
A201	27212346	Front panel
A203	28198939	Facet (S)
A204	27268055	Guide (Tray)
A210	28148497	Door (Tray)
A215	28184825	Cover
A216	838930088	Self tapping screw, 3TTB+8B(UN)
A219	28141489	Cushion
A221	27262671	Plate (Bottom)
A301	28191952A	Clear plate <MPP>
	28191944A	Clear plate <MDT,MGR,MGT>
A705	29362982	Label (AVIS&CLASS1) <MPP,MGT>
	29362939	Label (WARNING) <MDT>
	29362991	Label <MGR>
F901	⚠ 252074 or	Fuse, 2A-SE-EAK <MPP,MGR,MGT>
	⚠ 252074CC	
J904	2063A14070	Crimp assy
P101	2042161022	Flexible flat cable, NCFC2-161022
P701	2045351022	Flexible flat cable, NCFC5-351022
P703	2047201012	Flexible flat cable, NCFC7-201012


EXPLODED VIEW PARTS LIST-2

REF. NO.	PART NO.	DESCRIPTION
P901	 253335HIT or	Power cord, AS-CEE <MPP,MGT>
	 253336VOL	
	 253332HIT or	Power cord, AS-UC-2 <MDT>
	 253333VOL	
	 253337HIT or	Power cord, AS-CCEE <MGR>
	 253338VOL	
T901	 2301553	Power transformer, NPT-1426P <MPP>
	 2301552	Power transformer, NPT-1426D <MDT>
	 2301555	Power transformer, NPT-1426G <MGR,MGT>
U1	1H477523-1B	Main circuit PC board assy NADG-7323-1B <MGT>
	1H477523-1C	Main circuit PC board assy NADG-7323-1C <MDT>
	1H477523-1D	Main circuit PC board assy NADG-7323-1D <MGR>
	1H477523-1E	Main circuit PC board assy NADG-7323-1E <MPP>
U2	1H477524-1B	Microprocessor circuit PC board, NADG-7324-1B <MGT>
	1H477524-1C	Microprocessor circuit PC board, NADG-7324-1C <MDT>
	1H477524-1D	Microprocessor circuit PC board, NADG-7324-1D <MGR>
	1H477524-1E	Microprocessor circuit PC board, NADG-7324-1E <MPP>
U3	1H477525-1B	Driver circuit PC board assy, NAAF-7325-1B <MGT>
	1H477525-1C	Driver circuit PC board assy, NAAF-7325-1C <MDT>
	1H477525-1D	Driver circuit PC board assy, NAAF-7325-1D <MGR>
	1H477525-1E	Driver circuit PC board assy, NAAF-7325-1E <MPP>
U4	1H477526-1B	Display circuit PC board assy, NADIS-7326-1B <MGT>
	1H477526-1C	Display circuit PC board assy, NADIS-7326-1C <MDT>
	1H477526-1D	Display circuit PC board assy, NADIS-7326-1D <MGR>
	1H477526-1E	Display circuit PC board assy, NADIS-7326-1E <MPP>
U5	1H477527-1B	Regulator circuit PC board assy, NAPS-7327-1B <MGT>
	1H477527-1C	Regulator circuit PC board assy, NAPS-7327-1C <MDT>
	1H477527-1D	Regulator circuit PC board assy, NAPS-7327-1D <MGR>
	1H477527-1E	Regulator circuit PC board assy, NAPS-7327-1E <MPP>
U6	1H477528-1B	Power transformer PC board assy, NAPS-7328-1B <MGT>
	1H477528-1C	Power transformer PC board assy, NAPS-7328-1C <MDT>
	1H477528-1D	Power transformer PC board assy, NAPS-7328-1D <MGR>
	1H477528-1E	Power transformer PC board assy, NAPS-7328-1E <MPP>
U7	1H477529-1B	Open/ Close switch PC board assy, NASW-7329-1B <MGT>
	1H477529-1C	Open/ Close switch PC board assy, NASW-7329-1C <MDT>
	1H477529-1D	Open/ Close switch PC board assy, NASW-7329-1D <MGR>
	1H477529-1E	Open/ Close switch PC board assy, NASW-7329-1E <MPP>
Z01	24800018A	CD mechanism assy, NCD-170S

<MPP>: European model only
 <MDT>: Taiwanese model only
 <MGT>: Asian model only
 <MGR>: Chinese model only

NOTE: THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

CD MECHANISM EXPLODED VIEW (1)

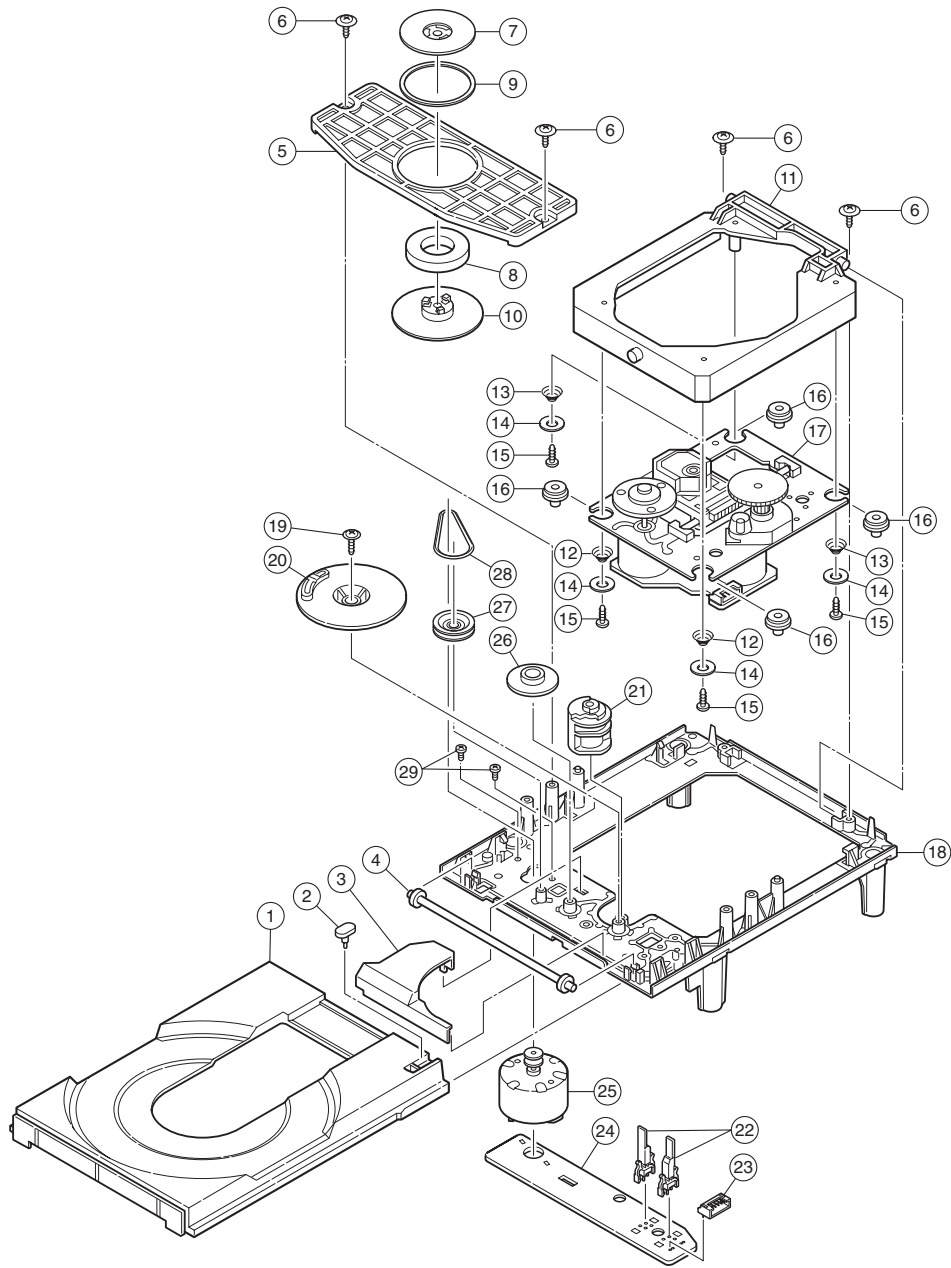


PARTS LIST

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
1	2646-290-01	Tray	16	2627-234-01	Insulator
2	-	Stopper	17	-	Drive unit
3	2625-544-01	Gear cover	18	2625-552-06	Main chassis
4	2625-535-01	Tray Gear	19	3319-501-51	PTPWH2.6x16, Screw
5	2625-546-01	Chucking plate	20	2625-547-01	Drive Gear
6	-	PTPWH2.6x7, Screw	21	2625-545-04	Control cam
7	2625-537-01	Chucking yoke	22	1692-667-11	Leaf switch
8	1452-493-21	Magnet	23	1564-721-11	Socket
9	2625-541-02	Damper	24	1640-523-11	Loading PC board
10	2646-291-01	Chucking pulley	25	X2625-117-1	Loading motor
11	2646-288-01	Sub chassis	26	2625-274-02	Middle gear
12	2627-236-01	Coil spring (front)	27	2625-536-02	Loading pulley
13	2627-235-01	Coil spring (back)	28	3653-387-00	LM belt
14	2646-289-01	Washer	29	-	B2.6x2.5, Screw
15	-	P2.6x10, Screw			

The mechanical parts with no part number in the exploded views are not supplied.

CD MECHANISM EXPLODED VIEW (2)


(Pickup drive unit)

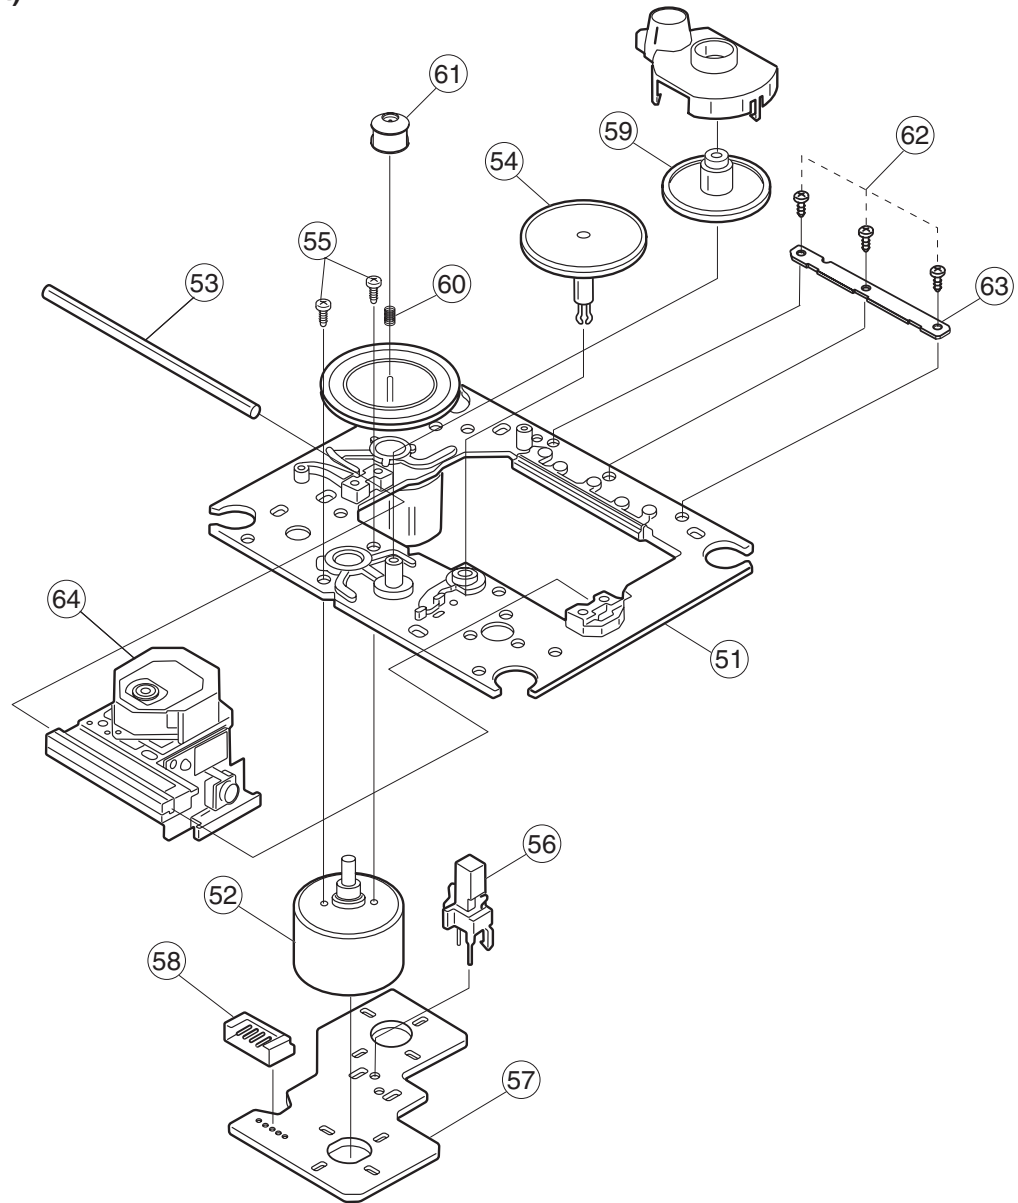

PARTS LIST

Ref. No.	Part No.	Description
51	X2625-984-1	Motor chassis ass'y
52	X2625-769-1	Motor gear ass'y
53	2656-908-01	Sled shaft
54	2625-188-02	Gear A
55	7621-255-15	P2x3, Screw
56	1572-085-11	Leaf switch
57	1639-678-12	Motor PC board
58	1564-722-11	Socket
59	2627-003-02	Gear B
60	2625-191-01	Coil spring
61	2625-477-01	Center ring
62	2641-386-01	Special screw, 2*5
63	2625-625-01	Reinforcement board
64	8848-483-05	KSS-213C, Pickup

BLOCK DIAGRAM

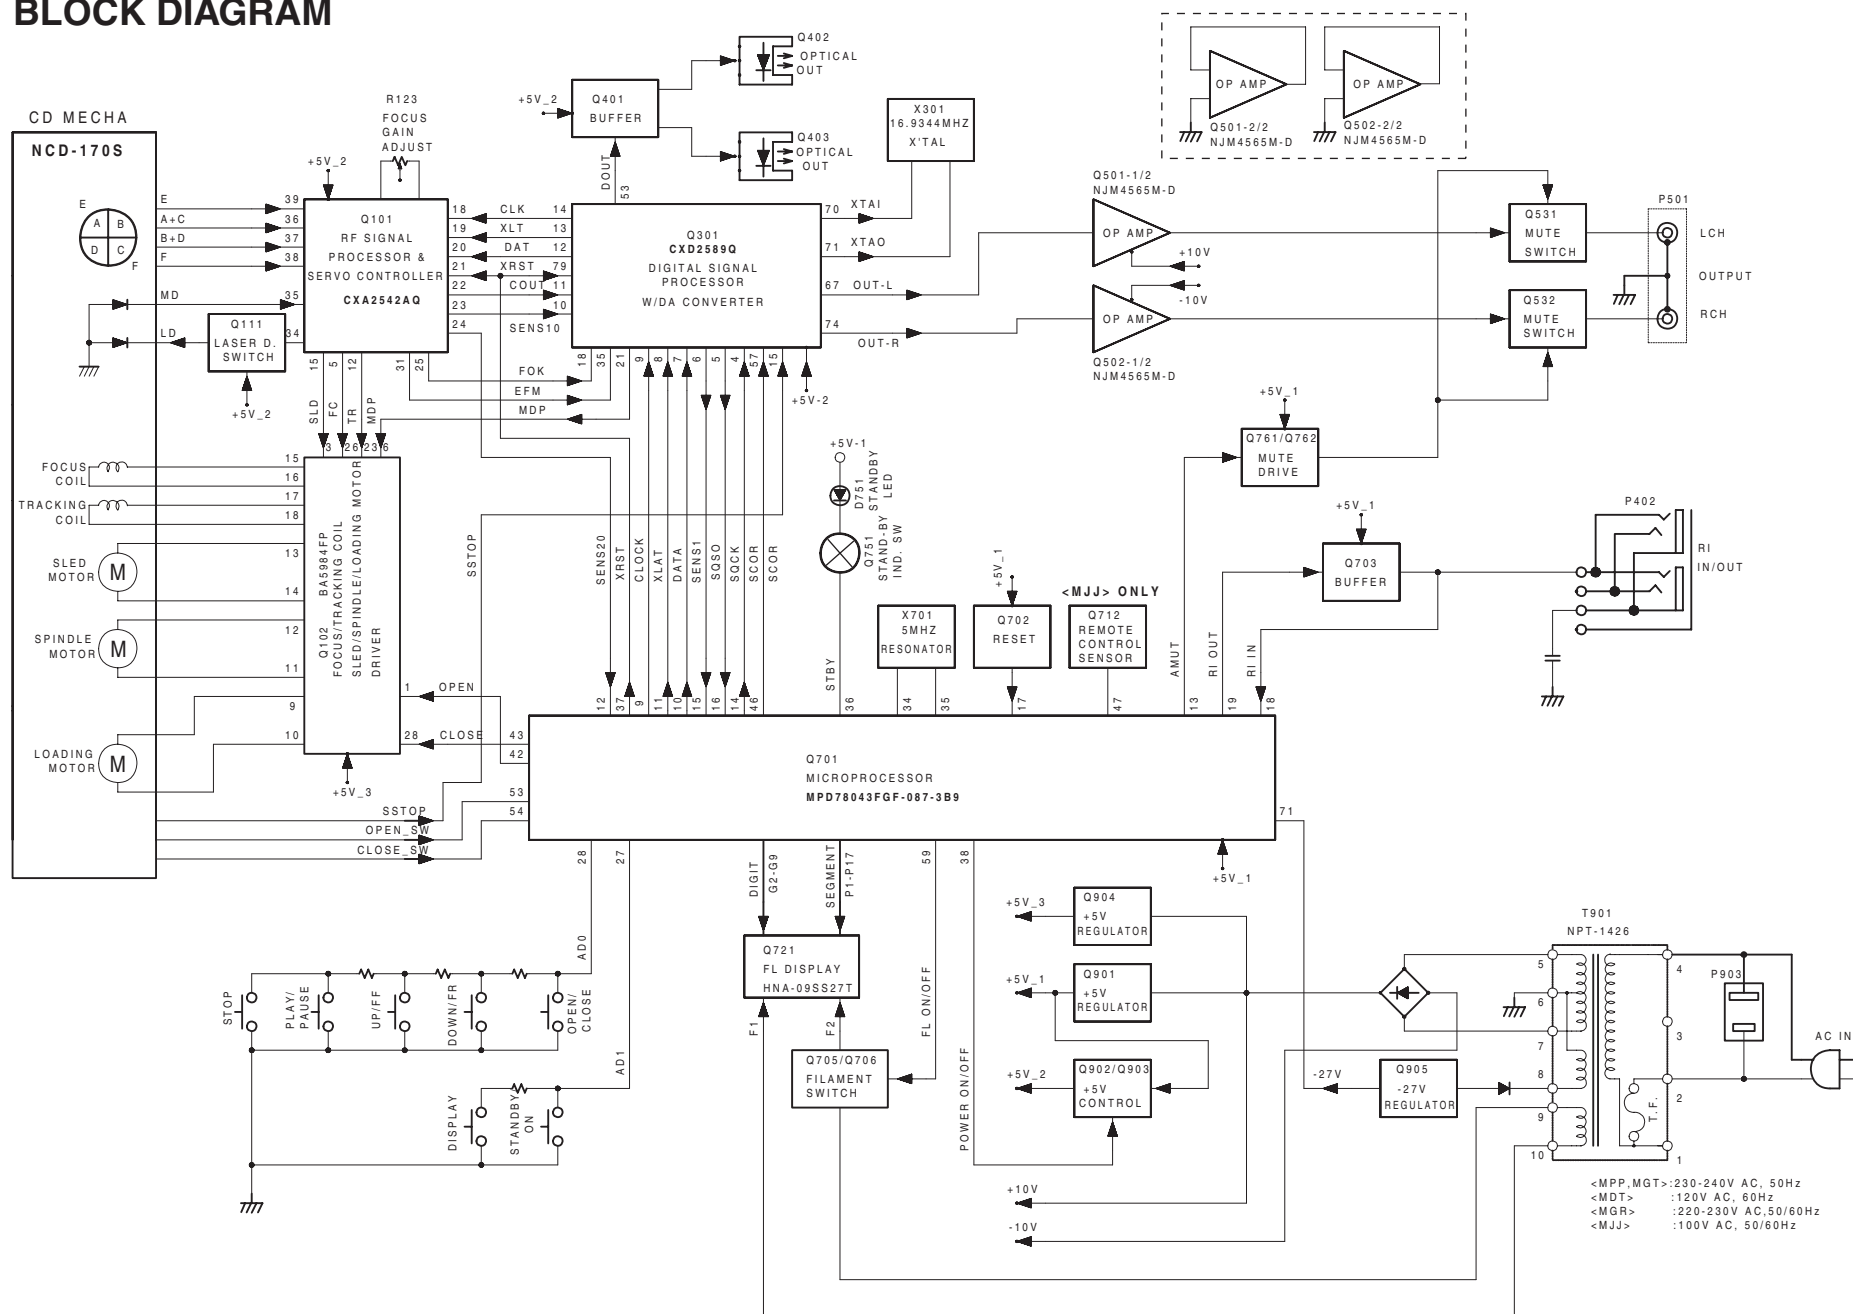

SCHEMATIC DIAGRAM

1

2


3

4

5

CD Mechanism

NCD-170S

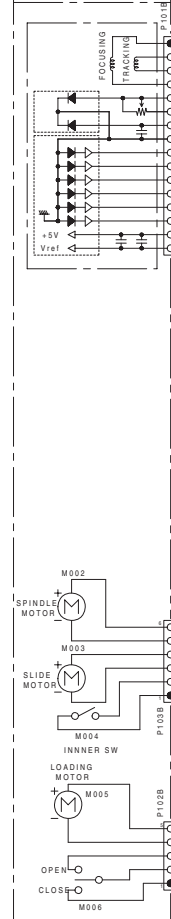

NADG-7323

U1 Main circuit PC board

Q101 CXA2542AQ

Q102 BA5984FP

Q103 2SA950-Y

Q104 2SA950-Y

Q105 2SA950-Y

Q106 2SA950-Y

Q107 2SA950-Y

Q108 2SA950-Y

Q109 2SA950-Y

Q110 2SA950-Y

Q111 2SA950-Y

Q112 2SA950-Y

Q113 2SA950-Y

Q114 2SA950-Y

Q115 2SA950-Y

Q116 2SA950-Y

Q117 2SA950-Y

Q118 2SA950-Y

Q119 2SA950-Y

Q120 2SA950-Y

Q121 2SA950-Y

Q122 2SA950-Y

Q123 2SA950-Y

Q124 2SA950-Y

Q125 2SA950-Y

Q126 2SA950-Y

Q127 2SA950-Y

Q128 2SA950-Y

Q129 2SA950-Y

Q130 2SA950-Y

Q131 2SA950-Y

Q132 2SA950-Y

Q133 2SA950-Y

Q134 2SA950-Y

Q135 2SA950-Y

Q136 2SA950-Y

Q137 2SA950-Y

Q138 2SA950-Y

Q139 2SA950-Y

Q140 2SA950-Y

Q141 2SA950-Y

Q142 2SA950-Y

Q143 2SA950-Y

Q144 2SA950-Y

Q145 2SA950-Y

Q146 2SA950-Y

Q147 2SA950-Y

Q148 2SA950-Y

Q149 2SA950-Y

Q150 2SA950-Y

Q151 2SA950-Y

Q152 2SA950-Y

Q153 2SA950-Y

Q154 2SA950-Y

Q155 2SA950-Y

Q156 2SA950-Y

Q157 2SA950-Y

Q158 2SA950-Y

Q159 2SA950-Y

Q160 2SA950-Y

Q161 2SA950-Y

Q162 2SA950-Y

Q163 2SA950-Y

Q164 2SA950-Y

Q165 2SA950-Y

Q166 2SA950-Y

Q167 2SA950-Y

Q168 2SA950-Y

Q169 2SA950-Y

Q170 2SA950-Y

Q171 2SA950-Y

Q172 2SA950-Y

Q173 2SA950-Y

Q174 2SA950-Y

Q175 2SA950-Y

Q176 2SA950-Y

Q177 2SA950-Y

Q178 2SA950-Y

Q179 2SA950-Y

Q180 2SA950-Y

Q181 2SA950-Y

Q182 2SA950-Y

Q183 2SA950-Y

Q184 2SA950-Y

Q185 2SA950-Y

Q186 2SA950-Y

Q187 2SA950-Y

Q188 2SA950-Y

Q189 2SA950-Y

Q190 2SA950-Y

Q191 2SA950-Y

Q192 2SA950-Y

Q193 2SA950-Y

Q194 2SA950-Y

Q195 2SA950-Y

Q196 2SA950-Y

Q197 2SA950-Y

Q198 2SA950-Y

Q199 2SA950-Y

Q200 2SA950-Y

Q201 2SA950-Y

Q202 2SA950-Y

Q203 2SA950-Y

Q204 2SA950-Y

Q205 2SA950-Y

Q206 2SA950-Y

Q207 2SA950-Y

Q208 2SA950-Y

Q209 2SA950-Y

Q210 2SA950-Y

Q211 2SA950-Y

Q212 2SA950-Y

Q213 2SA950-Y

Q214 2SA950-Y

Q215 2SA950-Y

Q216 2SA950-Y

Q217 2SA950-Y

Q218 2SA950-Y

Q219 2SA950-Y

Q220 2SA950-Y

Q221 2SA950-Y

Q222 2SA950-Y

Q223 2SA950-Y

Q224 2SA950-Y

Q225 2SA950-Y

Q226 2SA950-Y

Q227 2SA950-Y

Q228 2SA950-Y

Q229 2SA950-Y

Q230 2SA950-Y

Q231 2SA950-Y

Q232 2SA950-Y

Q233 2SA950-Y

Q234 2SA950-Y

Q235 2SA950-Y

Q236 2SA950-Y

Q237 2SA950-Y

Q238 2SA950-Y

Q239 2SA950-Y

Q240 2SA950-Y

Q241 2SA950-Y

Q242 2SA950-Y

Q243 2SA950-Y

Q244 2SA950-Y

Q245 2SA950-Y

Q246 2SA950-Y

Q247 2SA950-Y

Q248 2SA950-Y

Q249 2SA950-Y

Q250 2SA950-Y

Q251 2SA950-Y

Q252 2SA950-Y

Q253 2SA950-Y

Q254 2SA950-Y

Q255 2SA950-Y

Q256 2SA950-Y

Q257 2SA950-Y

Q258 2SA950-Y

Q259 2SA950-Y

Q260 2SA950-Y

Q261 2SA950-Y

Q262 2SA950-Y

Q263 2SA950-Y

Q264 2SA950-Y

Q265 2SA950-Y

Q266 2SA950-Y

Q267 2SA950-Y

Q268 2SA950-Y

Q269 2SA950-Y

Q270 2SA950-Y

Q271 2SA950-Y

Q272 2SA950-Y

Q273 2SA950-Y

Q274 2SA950-Y

Q275 2SA950-Y

Q276 2SA950-Y

Q277 2SA950-Y

Q278 2SA950-Y

Q279 2SA950-Y

Q280 2SA950-Y

Q281 2SA950-Y

Q282 2SA950-Y

Q283 2SA950-Y

Q284 2SA950-Y

Q285 2SA950-Y

Q286 2SA950-Y

Q287 2SA950-Y

Q288 2SA950-Y

Q289 2SA950-Y

Q290 2SA950-Y

Q291 2SA950-Y

Q292 2SA950-Y

Q293 2SA950-Y

Q294 2SA950-Y

Q295 2SA950-Y

Q296 2SA950-Y

Q297 2SA950-Y

Q298 2SA950-Y

Q299 2SA950-Y

Q300 2SA950-Y

Q301 2SA950-Y

Q302 2SA950-Y

Q303 2SA950-Y

Q304 2SA950-Y

Q305 2SA950-Y

Q306 2SA950-Y

Q307 2SA950-Y

Q308 2SA950-Y

Q309 2SA950-Y

Q310 2SA950-Y

Q311 2SA950-Y

Q312 2SA950-Y

Q313 2SA950-Y

Q314 2SA950-Y

Q315 2SA950-Y

Q316 2SA950-Y

Q317 2SA950-Y

Q318 2SA950-Y

Q319 2SA950-Y

Q320 2SA950-Y

Q321 2SA950-Y

Q322 2SA950-Y

Q323 2SA950-Y

Q324 2SA950-Y

Q325 2SA950-Y

Q326 2SA950-Y

Q327 2SA950-Y

Q328 2SA950-Y

Q329 2SA950-Y

Q330 2SA950-Y

Q331 2SA950-Y

Q332 2SA950-Y

Q333 2SA950-Y

Q334 2SA950-Y

Q335 2SA950-Y

Q336 2SA950-Y

Q337 2SA950-Y

Q338 2SA950-Y

Q339 2SA950-Y

Q340 2SA950-Y

Q341 2SA950-Y

Q342 2SA950-Y

Q343 2SA950-Y

Q344 2SA950-Y

Q345 2SA950-Y

Q346 2SA950-Y

Q347 2SA950-Y

Q348 2SA950-Y

Q349 2SA950-Y

Q350 2SA950-Y

Q351 2SA950-Y

Q352 2SA950-Y

Q353 2SA950-Y

Q354 2SA950-Y

Q355 2SA950-Y

Q356 2SA950-Y

Q357 2SA950-Y

Q358 2SA950-Y

Q359 2SA950-Y

Q360 2SA950-Y

Q361 2SA950-Y

Q362 2SA950-Y

Q363 2SA950-Y

Q364 2SA950-Y

Q365 2SA950-Y

Q366 2SA950-Y

Q367 2SA950-Y

Q368 2SA950-Y

Q369 2SA950-Y

Q370 2SA950-Y

Q371 2SA950-Y

Q372 2SA950-Y

Q373 2SA950-Y

Q374 2SA950-Y

Q375 2SA950-Y

Q376 2SA950-Y

Q377 2SA950-Y

Q378 2SA950-Y

Q379 2SA950-Y

Q380 2SA950-Y

Q381 2SA950-Y




Q382 2SA950-Y

Q383 2SA950-Y

Q384 2SA950-Y

A | **B** | **C** | **D**

U1 Main circuit PC board



U5 Regulation

NAAR-7325 | **U3** Driver circuit

TYPE	RATING	T901	P901
MJJ	AC100V 50/60HZ	NPT-1426J	AS-Y
MDT	AC120V 60HZ	NPT-1426D	AS-UC2#18
MGR	AC220-230V 50/60HZ	NPT-1251J	AS-CCEE
MPP	AC230-240V 50HZ	NPT-1251P	AS-CEE
MGT	AC220-230V 50/60HZ	NPT-1251G	AS-CEE

TYPE	P903	F901
MJJ,MDT	NSCT-2P1777	NO
MGR	NSCT-2P2508	YES
MPP,MGT	NSCT-2P1424	YES




NAPS-7328 **U6** Power transformer
PC board

NAAR-7325 | **U3** Driver circuit



PC BOARD CONNECTION VIEW

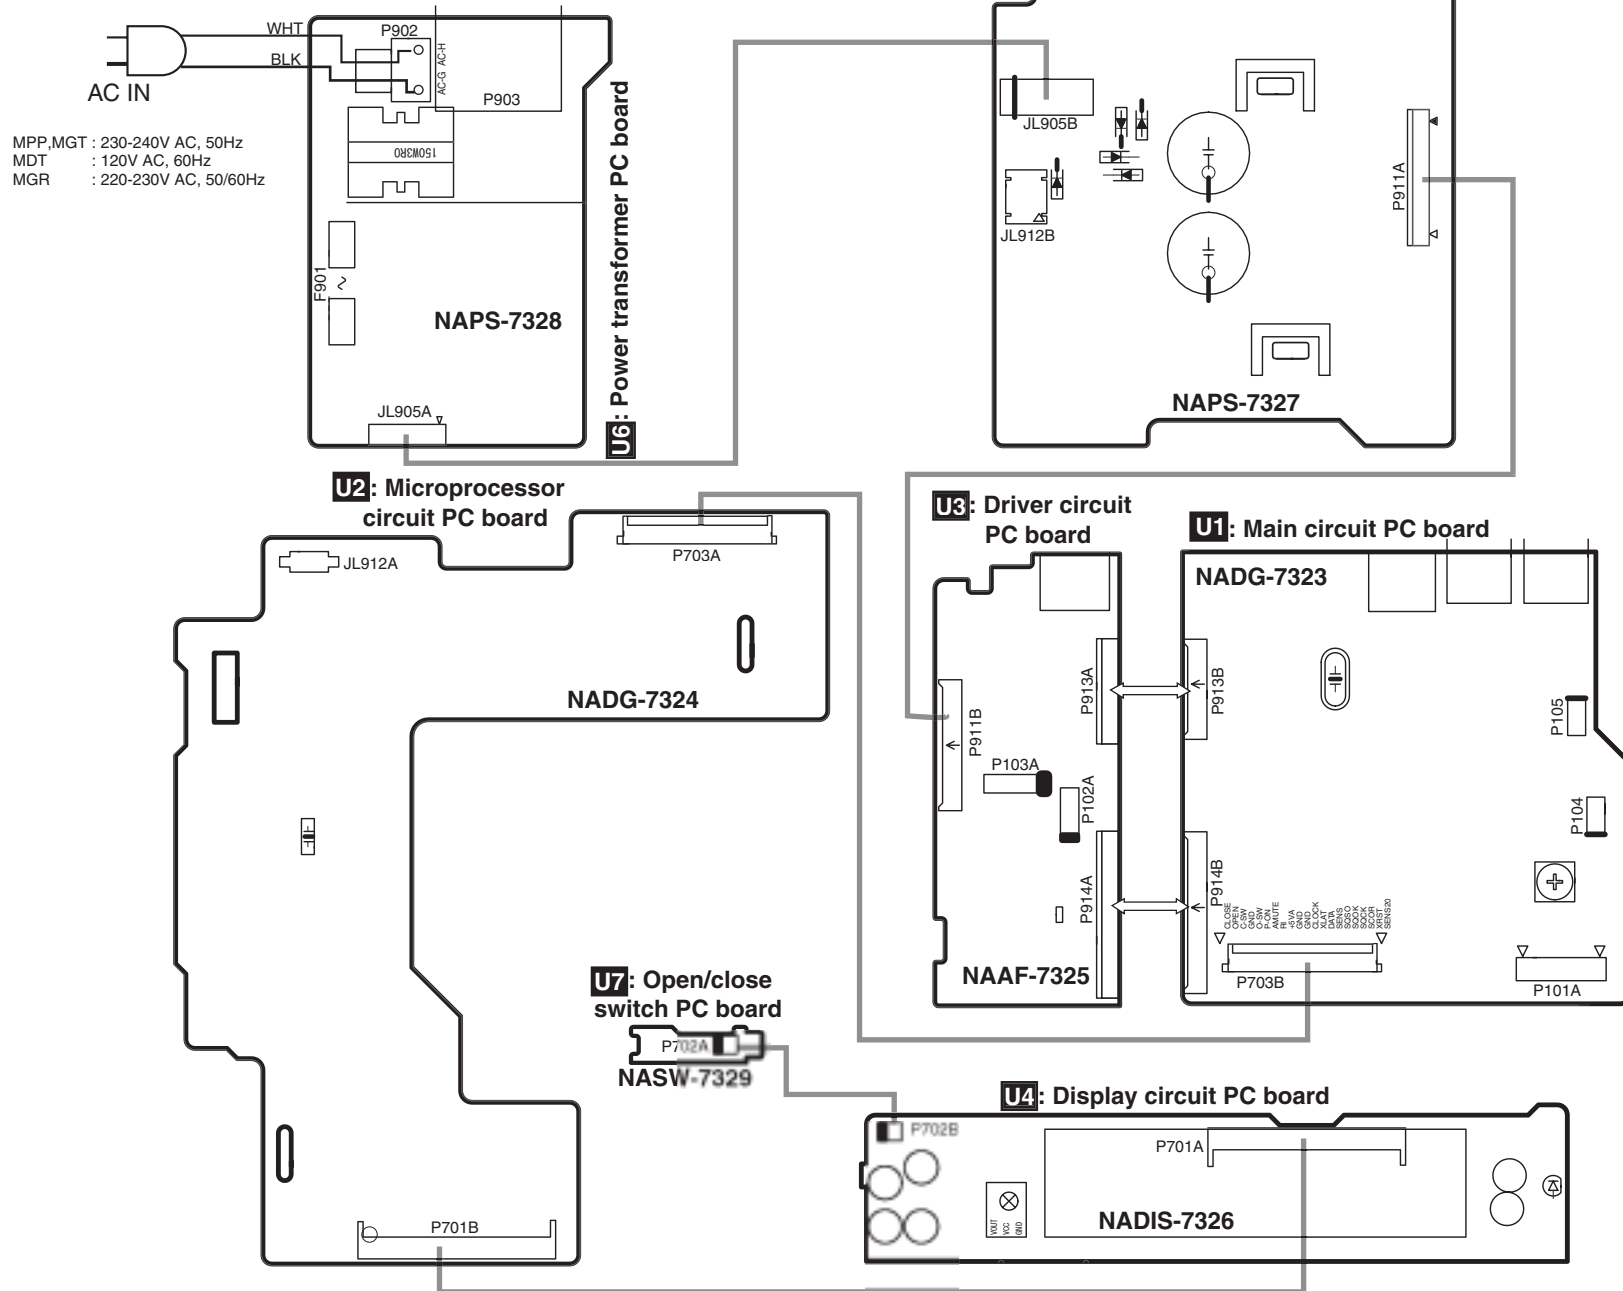

PRINTED CIRCUIT BOARD PARTS LIST-1

U1: Main circuit PC board

(NADG-7323-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q101	22241661R3	CXA2542AQ
Q301	22241500R3	CXD2589Q
Q401	22241546R2	TC7WT241FU
	Photo couplers	
Q402,Q403	24120082	GP1FA550TZ
	Transistors	
Q111	2211504	2SA950-Y
Q761	2216260R2	RN1407
Q762	2214540R2	RN2403
	Resonator	
X301	3010308	HC-49/U0316.9344M
	Diodes	
D101,D761,	223234R2 or	1SS352 or
D762	223269R2	1SS355
	Coils	
L101,L391,	231237K100R2, Choh	NCH-1475
L392		
	Sockets	
P101A	25052316	NSCT-16P2213
P101A or	25052510	NSCT-16P2407
P703B	25052216	NSCT-20P2113
P913B	25051234	NSCT-9P1024
P914B	25051240	NSCT-15P1030
	Plugs	
P104,P105	25056132	NPLG-2P1071
	Jack	
P451	25045601	NPJ-2PDB409, RI terminal
	Capacitors	
C101,C102, C181-C183, C301	354721019	100uF,6.3V,Elect.
C126	354780479	4.7uF,50V,Elect
C130	354763309	33uF,35V,Elect
C131	354780339	33uF,50V,Elect
C158	393380227	2.2uF,50V, (VX) Elect.
C315	353784799	0.47uF,50V,Elect
C335,C336	353762209	22uF,35V,Elect
C351,C391, C394,C762	354722219	220uF,6.3V,Elect
C401	354721019	100uF,6.3V,Elect
	Resistor	
R123	5210262	N06HR10KBC, Trimmer

U2: Microprocessor circuit PC board

(NADG-7324-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q701	22241694R3	MPD78043FGF-087-3B9
Q702	22241210	BMR-0101D
	Transistors	
Q703	2214540R2	RN2403
Q705,Q706	2211164	2SC2120-Y
Q751	2216260R2	RN1407
	Oscillator	
X701	3010343	CSTS0500MG06
	Diodes	
D701	224490510R2	UDZ5.1B, Zener
D702	223234R2 or	1SS352 or
	223269R2	1SS355
D703	224490560R2 c	UDZ5.6B or
	224550560R2	UDZS5.6B
	Sockets	
P701B	25052372	NSCT-35P2269
P703A	25052216	NSCT-20P2113
JL912A	25051088	NSCT-4P875
	Capacitors	
C701	354721019	100uF,6.3V,Elect.
C712	353721019	100uF,6.3V,Elect.

U3: Motor driver circuit PC board

(NAAF-7325-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q102	22241696R2	BA5984FP
Q501,Q502	22241383R2	NJM4565M-D
	Transistors	
Q531,Q532	2215410R2	RN1441
	Socket AS	
P102A	2002A391025	NSAS-10P0871
P103A	2002A391220	NSAS-12P0846
	Socket	
P911B	25051237	NSCT-12P1027
	Plugs	
P913A	25055705	NPLG-9P661
P914A	25055711	NPLG-15P667
	Jack	
P501	25045628	NPJ-2PDRW435, Audio out
	Capacitors	
C191	354742219	220uF,16V,Elect.
C503,C504	354784709	47uF,50V,Elect.
C533	354784799	0.47uF,50V,Elect.
C591,C592	354741019	100uF,16V,Elect.

PRINTED CIRCUIT BOARD PARTS LIST-2

U4: Display circuit PC board (NADIS-7326-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	FL tube	
Q721	212224	HNA-09SS28T
	LED	
D751	225338	SLR-332VR(h1=8mm)
	Socket AS	
P702	200EE390408	NSAS-4P0893
	Socket	
P701A	25052372	NSCT-35P2269
	Holder	
Q721A	27191157	FL
	Switches	
S702-S706	25035699	NPS-111-S662

U5: Power regulator circuit PC board (NAPS-7327-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q901,Q904	222780055JRC	NJM78M05FA
	Transistors	
Q902,Q905	2211504	2SA950-Y
Q903	2214480R2	RN1403
	Diodes	
D901-D904,	⚠ 22380260 or	RL1N4003 or
D906	22380035	GP104003E
D907	224492700R2	UDZ27B, Zener
	Socket	
JL905B	25050270	NSCT-6P98
	Plugs	
JL912B	25055625	NPLG-4P587
P911A	25055708	NPLG-12P664
	Capacitors	
C901,C902	394043327S	3300uF,16V,Elect. (RS)
C903,C904	354742219	220uF,6.3V,Elect.
C905	354721019	100uF,6.3V,Elect.
C907	354741019	100uF,16V,Elect.
C908	354781019	100uF,50V,Elect.
C909,C910	354764709	47uF,35V,Elect.
C921-C923	374723344	0.33uF+/-5%,50V,Plastic.
	Resistors	
R907	453530564	5.6 ohm+/-5%,1/2W, Metal
		<MPP>
R907	453530224	2.2 ohm+/-5%,1/2W, Metal
		<MGR,MDT,MGT>
	Heat sinks	
Q901A ,Q904A	27160492	RAD-158
	Screws	
Q901B,Q904B	82143010	3P+10FN(BC)

U6: Power transformer PC board (NAPS-7328-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	Coils	
L901	⚠ 231222	NCH-3454,Choke
		<MPP,MGR,MDT,MGT>
	Fuse holders	
F901A,F901B	⚠ 25050065	YSH403T
		<MPP,MGR,MGT>
	Sockets	
JL905A	25051110	NSCT-6P897
P903	⚠ 25051637	NSCT-2P1424, Outlet
		terminal <MPP,MGT>
P903	⚠ 25051990	NSCT-2P1777, Outlet
		terminal <MDT>
P903	⚠ 25052611	NSCT-2P2508, Outlet
		terminal <MGR>
	PLug	
P902	⚠ 25055676	NPLG-2P632

U7: Open/Close switch PC board (NAPS-7329-1B/1C/1D/1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	Switch	
S701	25035699	NPS-111-S662, Open/Close

<MPP> : European model only
 <MDT> : Taiwanese model only
 <MGT> : Asian model only
 <MGR> : Chinese model only


MICROPROCESSOR TERMINAL DESCRIPTION

Q701: uPD78043FGF

No.	SIGNAL	I/O	DESCRIPTION	No.	SIGNAL	I/O	DESCRIPTION
1	3G	O	Grid control output terminals(G3-G9)	36	STANDBY LED	O	Standby LED control terminal. H=ON, L=OFF
2	4G	O		37	DSP RESET	O	Reset output terminal to signal processing IC.
3	5G	O		38	POWER	O	Power source control output terminal. H=ON, L=OFF
4	6G	O		39		O	Not used. (Open)
5	7G	O		40		O	
6	8G	O		41		O	
7	9G	O		42	OPEN	O	Tray control output terminal.
8	+5V	I	Power supply +5V	43	CLOSE	O	Tray control output terminal.
9	CLK	O	Command transfer clock output terminal to signal processing IC.	44		O	Not used. (Open)
10	DATA	O	Command transfer data output terminal to signal processing IC.	45		O	
11	XLT	O	Command transfer latch data output terminal to signal processing IC.	46	SCOR	I	Sub-code frame detection signal input terminal from signal processing IC.
12	SENS2	I	Sens. 2 signal input terminal from signal processing IC.	47	RM CN	I	Remote control signal input terminal.
13	AMUT	O	Muting output terminal to analog circuit. H=ON L=OFF	48	GND	I	Ground terminal.
14	SQCK	O	Sub-code data output terminal to signal processing IC.	49		O	Not used. (Open)
15	SENS	I	Sens. Signal input terminal from signal processing IC.	50		O	
16	SQSO	I	Sub-code data input terminal from signal processing IC.	51		O	
17	RESET	I	Reset signal input terminal.	52	+5V	I	Power supply terminal. +5V
18	RI INPUT	I	System control signal input terminal.	53	OPEN SW	I	Tray open switch input terminal.
19	RI OUTPUT	O	System control signal output terminal.	54	CLOSE SW	I	Tray close switch input terminal.
20	GND	I	Power supply for A/D converter. (Ground)	55		I	Not used. (Open)
21		O	Not used. (Open)	56		I	
22		O		57		I	
23		O		58		I	
24		O		59	FL OFF	O	Control output terminal of FL tube. H=ON, L=OFF
25		O		60	P1	O	Segment signal output terminals.
26		O		61	P2	O	
27		O		62	P3	O	
28	AD1	I	Operation input key for A/D converter.	70			
29	AD0	I	Operation input key for A/D converter.	71	-VDISP		Negative power supply terminal of FL tube.
30	+5V	I	Power supply terminal. +5V	72	P12	O	Segment signal output terminals.
31	+5V	I	Power supply terminal for A/D converter. +5V	73	P13	O	
32	GND	I	Not used. (To connect to ground)	74	P14	O	
33		O	Not used. (Open)	75			
34	GND	I	Ground terminal.	76			
35	X1	I	System clock oscillation circuit input terminal. (5MHz)	77			
	X2	O	System clock oscillation circuit output terminal.	78		O	Not used. (Open)
				79	1G	O	Grid signal output terminals.
				80	2G	O	

FL TUBE VIEW

GRID ASSIGNMENT

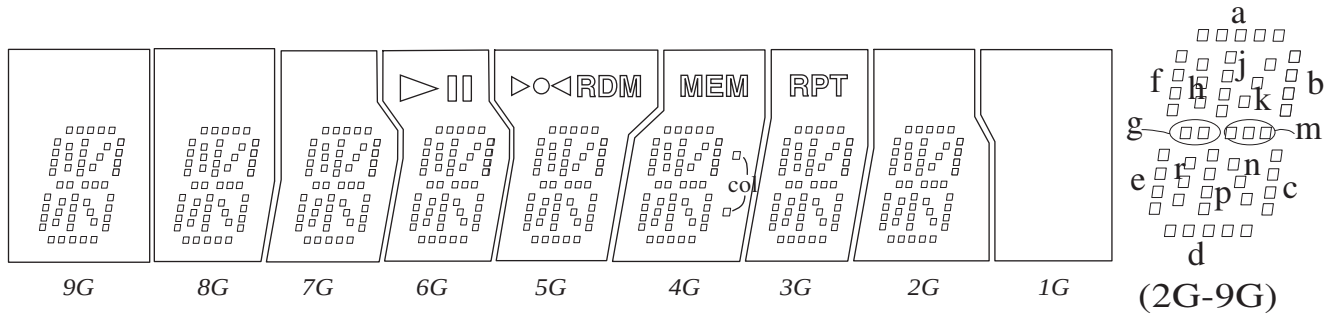

ANODE CONNECTION

	9G	8G	7G	6G	5G	4G	3G	2G	1G
P1	a	a	a	a	a	a	a	a	-
P2	j	j	j	j	j	j	j	j	-
P3	h	h	h	h	h	h	h	h	-
P4	k	k	k	k	k	k	k	k	-
P5	b	b	b	b	b	b	b	b	-
P6	f	f	f	f	f	f	f	f	-
P7	g	g	g	g	g	g	g	g	-
P8	m	m	m	m	m	m	m	m	-
P9	c	c	c	c	c	c	c	c	-
P10	e	e	e	e	e	e	e	e	-
P11	n	n	n	n	n	n	n	n	-
P12	r	r	r	r	r	r	r	r	-
P13	p	p	p	p	p	p	p	p	-
P14	d	d	d	d	d	d	d	d	-
P15	-	-	-	▷	RDM	MEM	RPT	-	-
P16	-	-	-	□□	-	-	-	-	-
P17	-	-	-	-	-	col	-	-	-

PIN CONNECTION

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
CONNECTION	F1	F1	NP	9G	8G	7G	6G	5G	4G	3G	2G	1G	NP	NP	NP	P17	P16	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	NP	F2	F2

Notes

- 1) Fn : Filament pin
- 2) nG : Grid pin
- 3) Pn : Anode pin
- 4) NP : No pin
- 5) NC : No connection

ADJUSTMENT PROCEDURE

1. SERVO ADJUSTMENT

1-1. Preparation

Set the VR123 is center position.

Connect the cables to the test point. (Fig.-1)


1-2. Focus gain adjustment

Load the test disc (YEDS-18) on the tray and play the track 2.


Adjust R123 until 1kHz the waveform of channels 1 and 2 on oscilloscope become specified level. (Fig.-2)

Check the jitter meter reading . It must be less than 12ns.



1-3. Remove the oscilloscope and audio oscillator.

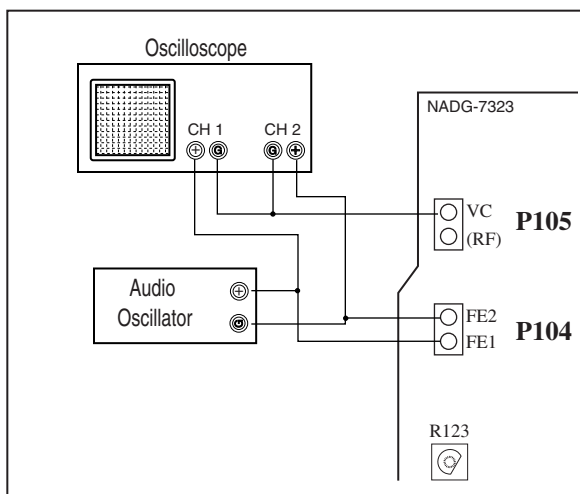


(Fig.-1)

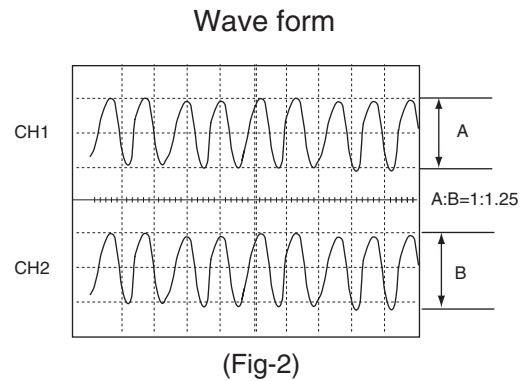


Adjustment points

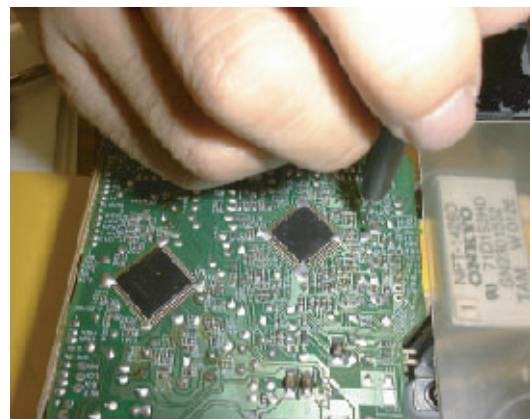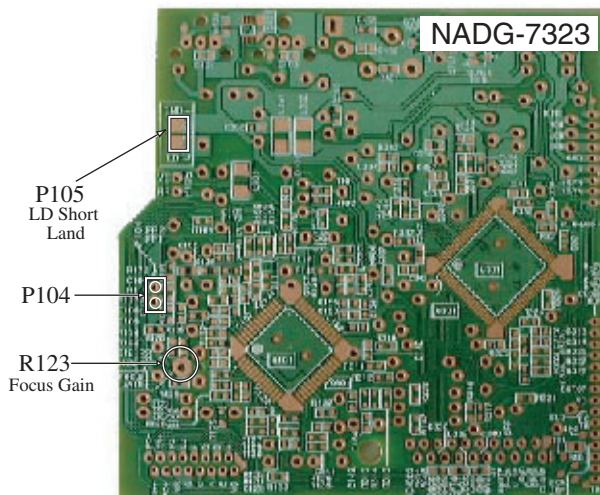

The driver for adjustment when adjusting is using the driver for adjustment insulated so that it may not be effected of a hand.

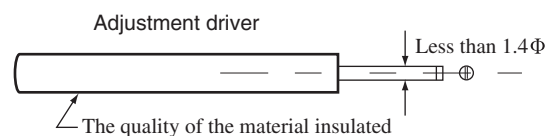

PACKING VIEW/ PARTS LIST

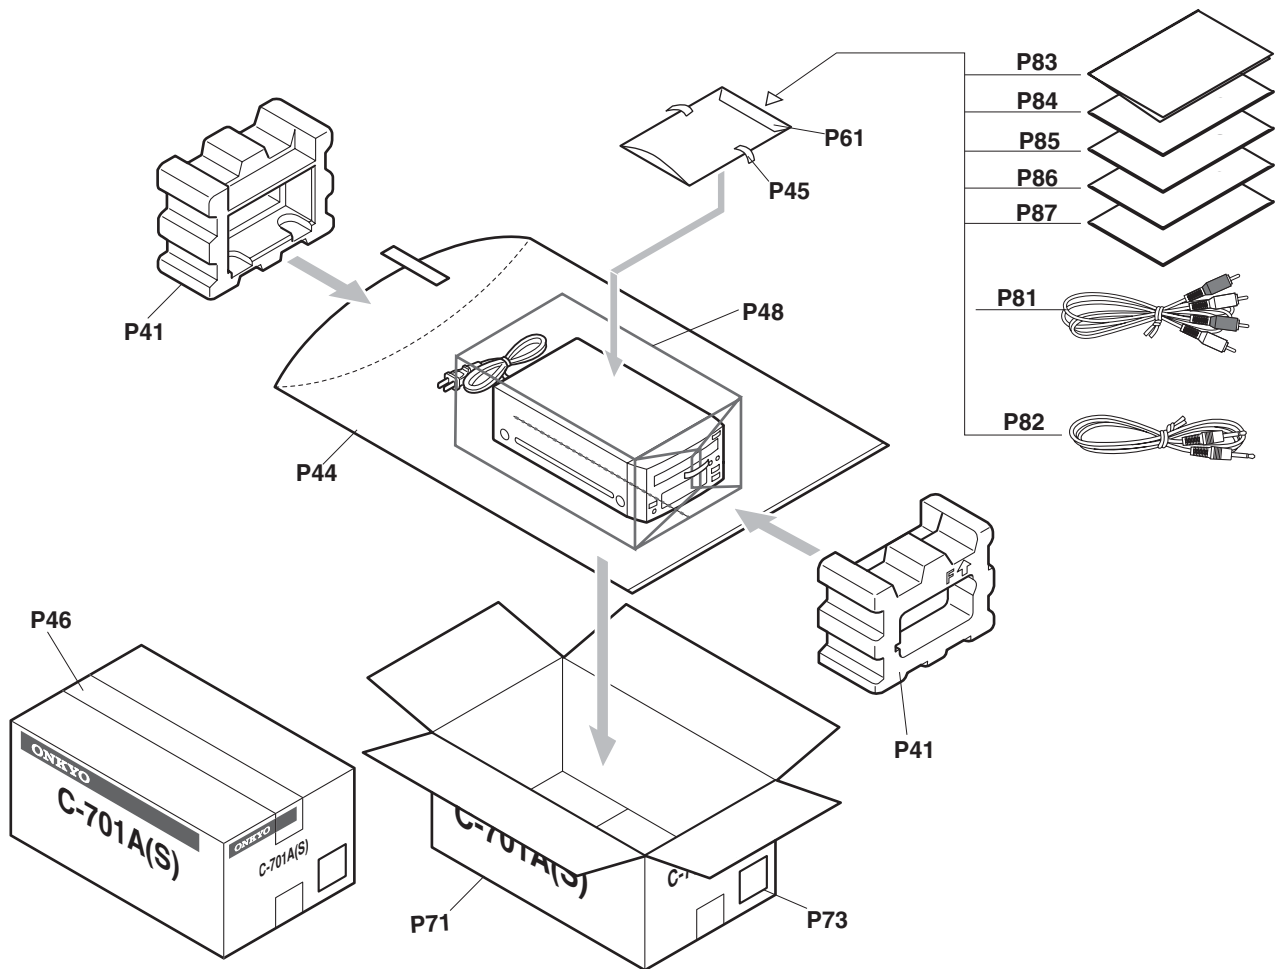

PARTS LIST

REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
P41	29092023A	Pad assy	P82	2010375 or 2010397	RI cable
P44	29100123C	Poly bag, 430 x 550	P83	29343190	Instruction manual, E
P45	29110149	Cellophane tape	P84	29343191	Instruction manual, U3FSI <MPP>
P46	29110098	PP tape	P85	29343192	Instruction manual, U3GDSW <MPP>
P48	29095906	Sheet	P86	29343193	Instruction manual, CT <MDT,MGR,MGT>
P61	29100097-1A	Poly bag, 350 x 250	P87	29343203	Instruction manual, CS <MGR>
P71	29053835	Carton box <MPP,MDT,MGT>			
	29053836	Carton box <MGR>			
P73	29362981A	EAN label			
P81	2010376 or 2010396	Audio connection cable			

<MPP>: European model only
 <MDT>: Taiwanese model only
 <MGT>: Asian model only
 <MGR>: Chinese model only

ONKYO CORPORATION

Sales & Product Planning Div. : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8111 Fax: 072-833-5222

ONKYO U.S.A. CORPORATION

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 E-mail: onkyo@onkyousa.com

ONKYO EUROPE ELECTRONICS GmbH

Industriestrasse 20, 82110 Germering, GERMANY
Tel: 089-849-320 Fax: 089-849-3265 E-mail: info@onkyo.de

ONKYO CHINA LIMITED

Units 2102-2107, Metroplaza Tower I, 223 Hing Fong Road, Kwai Chung,
N.T., HONG KONG Tel: 852-2429-3118 Fax: 852-2428-9039